

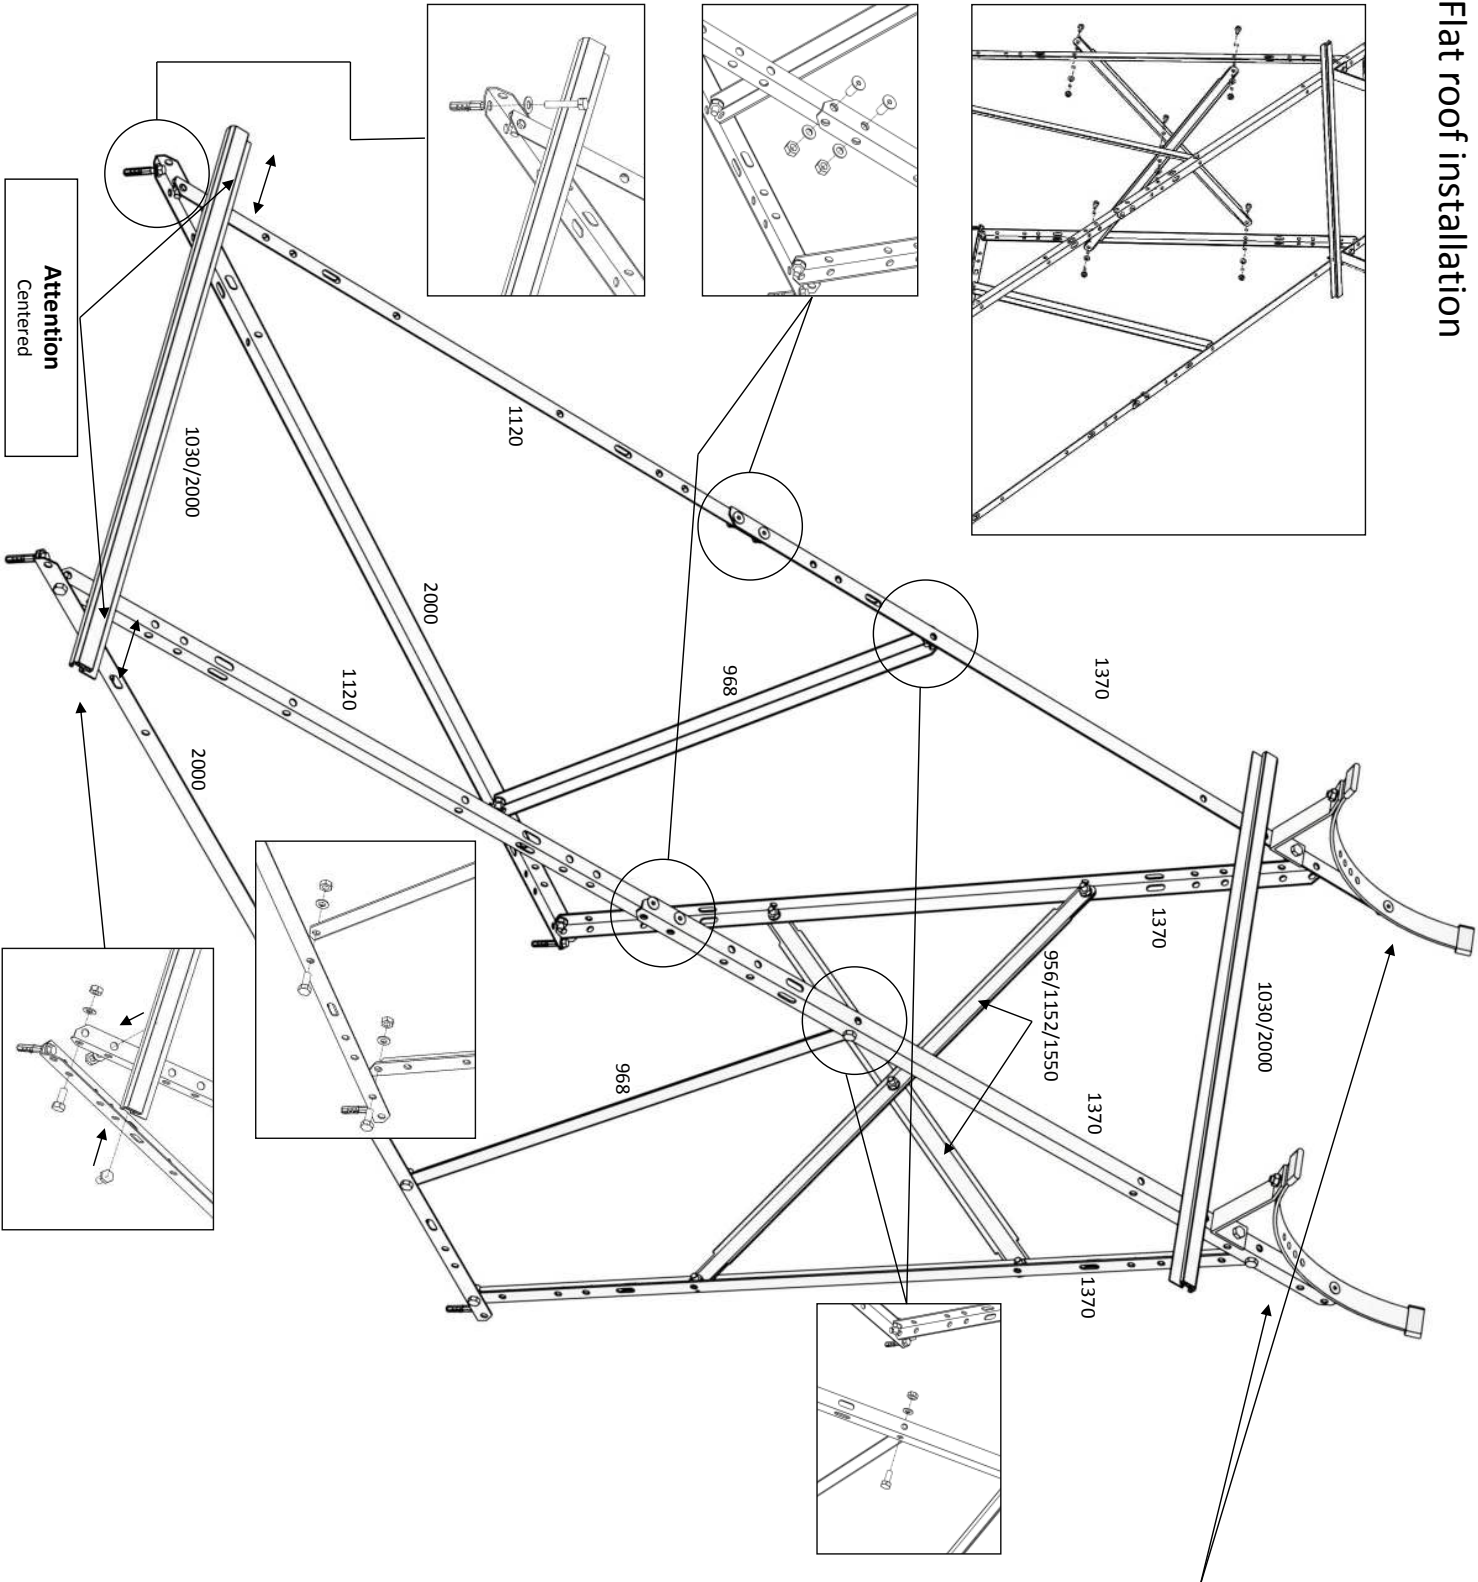








Flat roof installation

















Bill of materials		SBZ38FR
L bar 2000mm	2	
L bar 1370mm	4	
L bar 1120mm	2	
L bar 968mm	2	
U tank	2	
L tank	2	
Cross bar 1152	2	
Aluminum pt 2000mm	2	
Bolt M10x25	21	
Flat washer M10	35	
Nut M10	29	
Sink bolt M10x20	8	
Anchor bolt M8x50	4	
Plastic anchor D10	4	

Flat roof installation



Closed loop connection with fiber

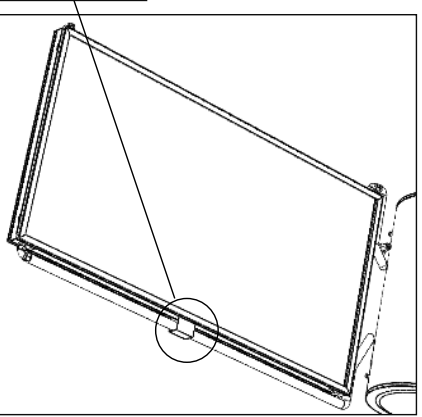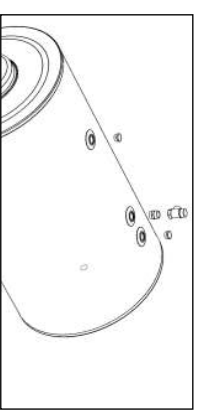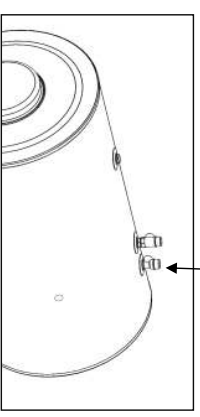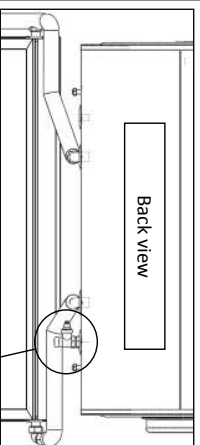

Bill of materials
Thermal valve 3 bar
Nipple $\frac{1}{2}$ " M X $\frac{1}{2}$ " F
Safety valve 6 or 10 bar
Nipple $\frac{3}{4}$ " X $\frac{1}{2}$ " M
Plug $\frac{1}{2}$ " M
Safety valve T/P (optional)
Elbow $\frac{1}{2}$ " X $\frac{1}{2}$ " M
Compression elbow Ø22 X $\frac{1}{2}$ " M
Compression plug Ø22
Compression connector Ø22 X Ø22
Fiber gaskets
Insulated stainless steel pipe DN16 (short)
Insulated stainless steel pipe DN16 (long)
Long pipe holder
Thermal fluid ANTI-FROGEN SOL HT (H)

IK230FB
1
1
1
1
2
-
2
2
2
2
4
1056mm
2600mm
2
3